



WINDOWS SIGN SERIES

DOTPIX LED
.com.au

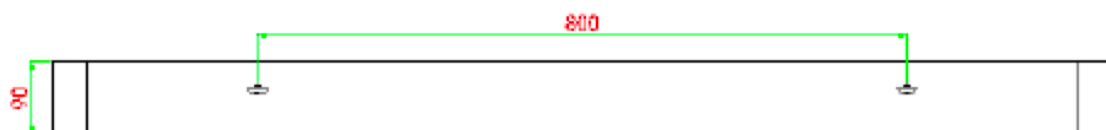

top view

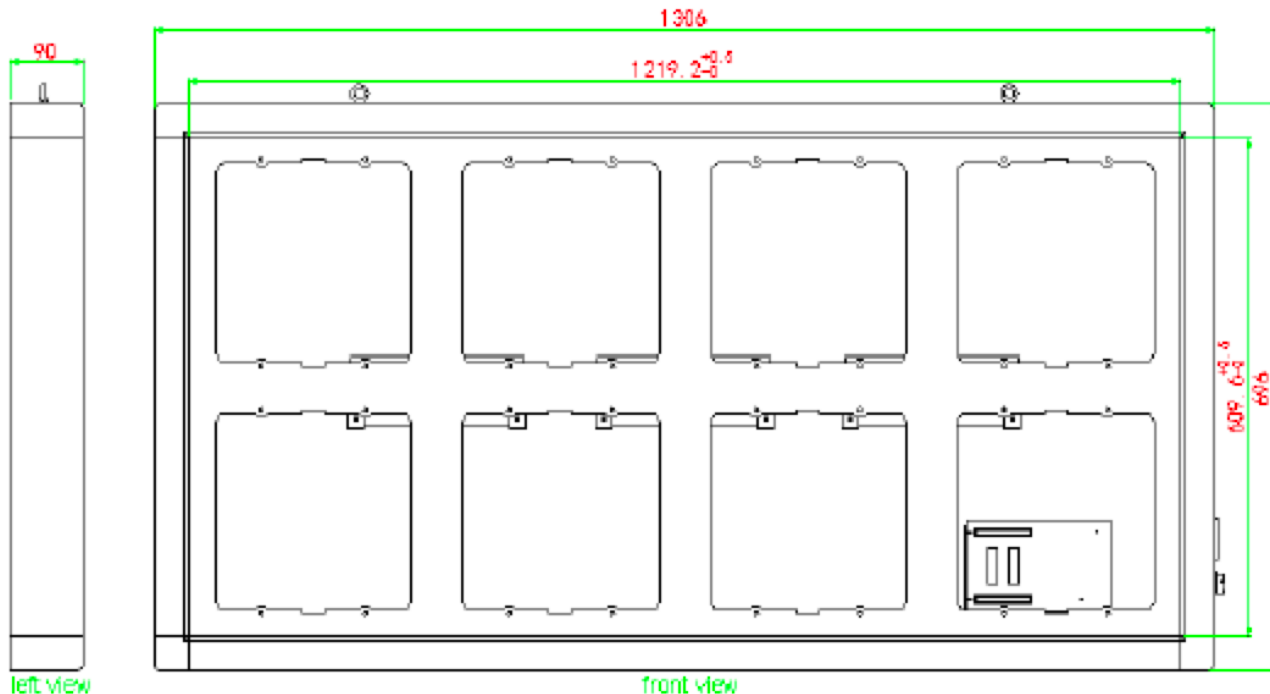

front view




bottom view

FAST AND EASY MAINTENANCE

Step1: Use "T" type wrench and insert the holes inside module, turn right to unlock to screw;

Step2: Unlock all screws, take the module out of cabinet;

Step3: Check and disconnect the power plug and data cables.

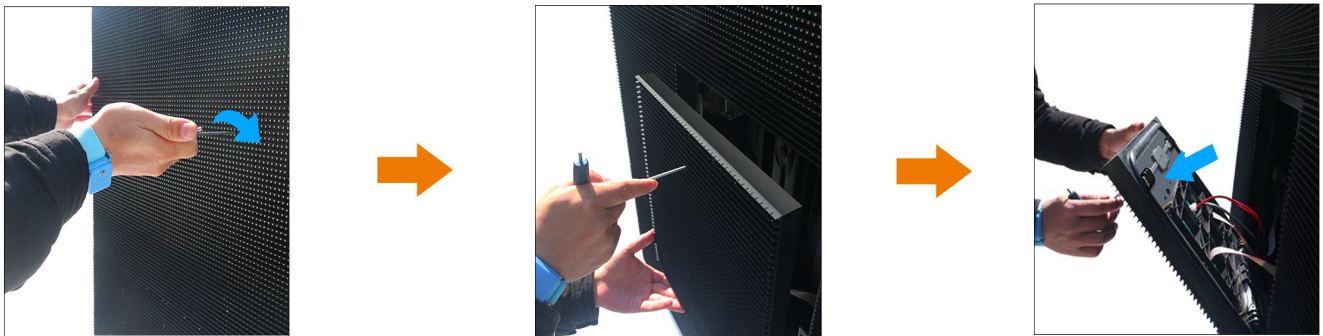

Parameters	Items		
Model No.	Window Sign P4	Window Sign P5	Window Sign P6
Pixel Pitch	4 mm	5 mm	6.35 mm
Pixel Configuration	SMD1921	SMD1921	SMD2727
Module Size (WxH)	320 x 320 mm	320 x 320 mm	304.8 x 304.8mm
Module Resolution	80 x 80 dots	64 x 64 dots	48 x 48 dots
Panel Dimension 1 (H x V)	960 x 640 mm	960 x 640 mm	3ft x 2ft
Panel Dimension 1 (Inch)	37.79" x 25.2"	37.79" x 25.2"	36" x 24"
Panel Resolution 1 (H x V)	240 x 160	192 x 128	144 x 96
Panel Dimension 2 (H x V)	1280 x 640 mm	1280 x 640 mm	4ft x 2ft
Panel Dimension 2 (Inch)	50.4" x 25.2"	50.4" x 25.2"	48" x 24"
Panel Resolution 2 (H x V)	320 x 160	256 x 128	192 x 96
Scan Drive Mode	1/10	1/8	1/4
Brightness (cd/m²)	5500 ~ 9500 nits	5500~10000 nits	6500 ~ 10000 nits

WINDOWS SIGN SERIES

Color processing (Bit)		15 bit	15 bit	16 bit
Color Temperature		6500 - 9300K	6500 - 9300K	6500 - 9300K
Refresh Rate		3840 Hz	≥1920 Hz	≥1920 Hz
Pixel Density(dots/m²)		62500	40000	24800
Viewing Angle (H/V) For High Mask		140/55-90	140/55-90	140/55-90
Viewing Angle (H/V) For Normal Mask		140/140	140/140	140/140
Input Voltage (V)		AC110V-240V	AC110V-240V	AC110V-240V
Input Power Frequency (Hz)		50/60	50/60	50/60
Power Consumption (Avg)(W/m²)		274	274	322
Power Consumption (Max)(W/m²)		≤830	≤830	≤968
Cabinet Material		Aluminum	Aluminum	Aluminum
Weight Per Panel		24-32 kg	24-32 kg	22-30 kg
Operational Temp / Humidity		-20°-60°C, 10-90% RH -4°-122°F, 10-90% RH	-20°-60°C, 10-90% RH -4°-122°F, 10-90% RH	-20°-60°C, 10-90% RH -4°-122°F, 10-90% RH
Control System	ColorLight	Color Light 5A-75E Receiving Card, C4 box		K5+/C4 box
	Novastar	MRV412/TB30		A5S Plus/TB30
IP Rating		Outdoor IP65		
Maintenance Method		Outdoor Fixed		
Warrenty		2 Years		
Maintenance Method		Front Service		