




## DR Series



Outdoor LED Module

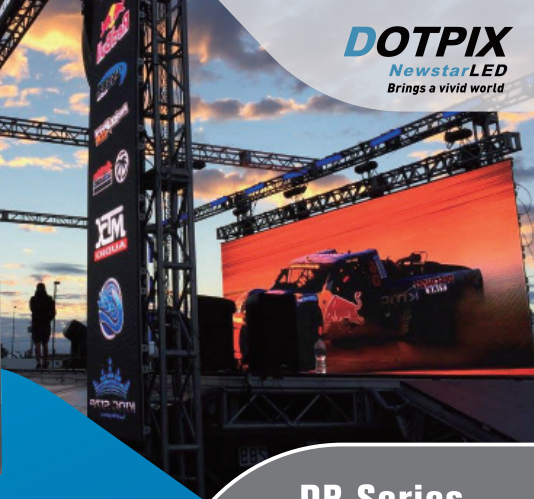

Indoor LED Module



Faster Lock



Protective  
Foam Design



Lightweight  
Rental Frame



Rear Service




Seamless Connection



Front Maintenance



Flat Installation



Curved Installation

## DR Series Specification

|                                       |                                         |                        |                        |                        |                        |
|---------------------------------------|-----------------------------------------|------------------------|------------------------|------------------------|------------------------|
| Model No.                             | DR191                                   | DR261                  | DR290                  | DR390                  | DR480                  |
| Pixel Pitch                           | 1.953mm                                 | 2.604mm                | 2.976mm                | 3.906mm                | 4.807mm                |
| LED Type                              | SMD1515                                 | SMD1515                | SMD1415                | SMD1921                | SMD1921                |
| Module Resolution                     | 128 x 128                               | 96 x 96                | 84 x 84                | 64 x 64                | 52 x 52                |
| Module Size                           | 250mm x 250mm                           |                        |                        |                        |                        |
| Cabinet Size                          | 500mm x 500mm / 500mm x 1000mm          |                        |                        |                        |                        |
| Cabinet Resolution（pixels）            | 256x 256<br>256x 512                    | 192 x 192<br>192 x 384 | 168 x 168<br>168 x 336 | 128 x 128<br>128 x 256 | 104 x 104<br>104 x 208 |
| Pixel Density（pixels/m <sup>2</sup> ） | 262144                                  | 147456                 | 112,896                | 65,536                 | 43,264                 |
| Driving Mode                          | 1/32                                    | 1/32                   | 1/21                   | 1/16                   | 1/13                   |
| Minimum Viewing Distance              | ≥2.4m                                   | ≥3.2m                  | ≥2.9m                  | ≥3.9m                  | ≥4.8m                  |
| Brightness(nits)                      | 600~800                                 | 600~800                | ≥4,000                 | ≥4,500                 | ≥4,500                 |
| IP Grade                              | Indoor IP45                             |                        | Outdoor IP65           |                        |                        |
| Refresh Rate                          | ≥3840Hz                                 |                        |                        |                        |                        |
| Color processing (Bit)                | 13bits~18bits                           |                        |                        |                        |                        |
| Viewing Angle(H/V)                    | 160°/160°                               |                        |                        |                        |                        |
| Maximum Power Consumption             | ≤580W/m <sup>2</sup>                    |                        |                        |                        |                        |
| Average Power Consumption             | ≤195W/m <sup>2</sup>                    |                        |                        |                        |                        |
| Input Voltage                         | AC110V~AC220V @ 50Hz/60Hz               |                        |                        |                        |                        |
| Operating Temperature                 | - 20℃~60℃                               |                        |                        |                        |                        |
| Operating Humidity                    | 10%~90%                                 |                        |                        |                        |                        |
| Cabinet Material                      | Die-casting Aluminum                    |                        |                        |                        |                        |
| Cabinet Weight                        | 9kg/panel or 14kg/panel                 |                        |                        |                        |                        |
| Operating System                      | Windows(Win7,Win8,etc.)                 |                        |                        |                        |                        |
| Signal Source Compatibility           | DVI, HDMI1.3, DP1.2, SDI, HDMI2.0, etc. |                        |                        |                        |                        |